



Geoscanners AB®



## **GTP-901**

The GTP-901 is a survey tripod for borehole antenna applications demanding extra height under the measuring and cable feeding pulley. The tripod has an integrated GSSI compatible encoder unit to facilitate the distance mode in borehole applications. The unit is made of strong materials such as fiber glass reinforced pipes and POM milled parts.

### ***General Specifications:***

Folded Length	137cm
Unit Weight	4.95kg
Maximum Height under the Pulley	152cm
Minimum Height under the Pulley	86cm
Maximum Load Weight	50 kg (equivalent to 200meters of std. Cable)
Fastener Adjustment free run	210 mm

### ***Encoder Specifications:***

Power	5VDC (20mA)
Output Format	Quadrature Channels A and B, no index
Calibration Value (on 12mm Cable)	129 Ticks/meter

## Assembly Instructions:

1. Hold firmly the pulley carriage in one hand.



2. Insert the vertical fastener into the hole in the top part of the pulley carriage. Make sure that the white POM bush is retracted back.



3. After the threaded fastener has been almost completely inserted press the white POM bush so it sits firmly in the upper "T" junction of the pulley carriage.



4. Fix the already assemble carriage to the top junction of the GTP-901 and make sure that the two nuts, upper and down, are secure. That will prevent the fastener to have lateral movements.




5. The fully assembled carriage should look like shown in the picture below





## Changing the height and/or the span of the Tripod:

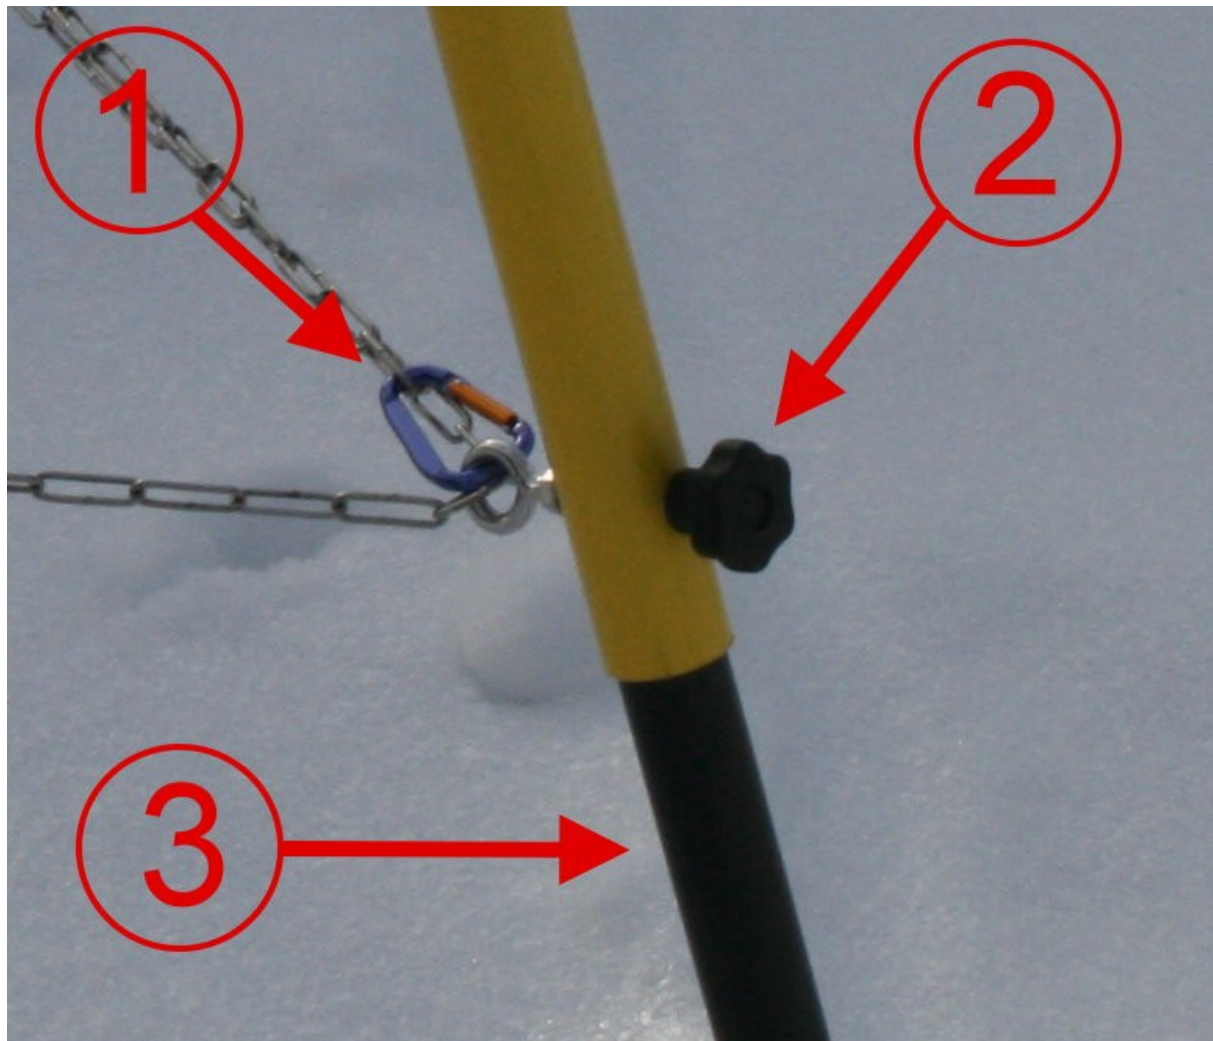

1. This is the fast release to enlarge or shorten the length of the metal chain in order to modify the span of the leg's spread. In some situations a better grip with the ground requires a larger span, while in others a smaller span is preferred.
2. Unscrew this knob to remove the locking eye-pin from the leg. Please pay attention that the knob will not allow you to apply force to the fiber glass pipe, do not force it into going in more than it allows.
3. These telescopic legs have two sets of holes allowing the tripod to be set for two different heights. The GTP-901 is shipped with the lowest height set. Unscrew the knob (2) as described above. Remove the eye-pin and slide out the black telescopic leg until you see the holes for the second set up. Insert back the eye-pin and secure it with the knob(2).

Position of the quick release for the metal chain:



## The encoder unit:




The encoder unit doesn't require any particular care. The magnets setting the impulses for the survey wheel input in the antenna or radar unit, are embedded in the pulley and protected against moisture or any other ambient effects. The encoder unit is already aligned to provide effective coupling between the magnets and the encapsulated hall sensor.

It is highly recommended that you calibrate the amount of pulses coming out of the encoder regularly. Specially that is true if you are using cables which have different cross diameters.

The required cable to connect to the antenna or radar unit is supplied with the GTP-901. The standard cable length is two (2) meters, but longer cables can be ordered on demand.

A display unit to control the distance is available as an option.

### Locking the Pulley:

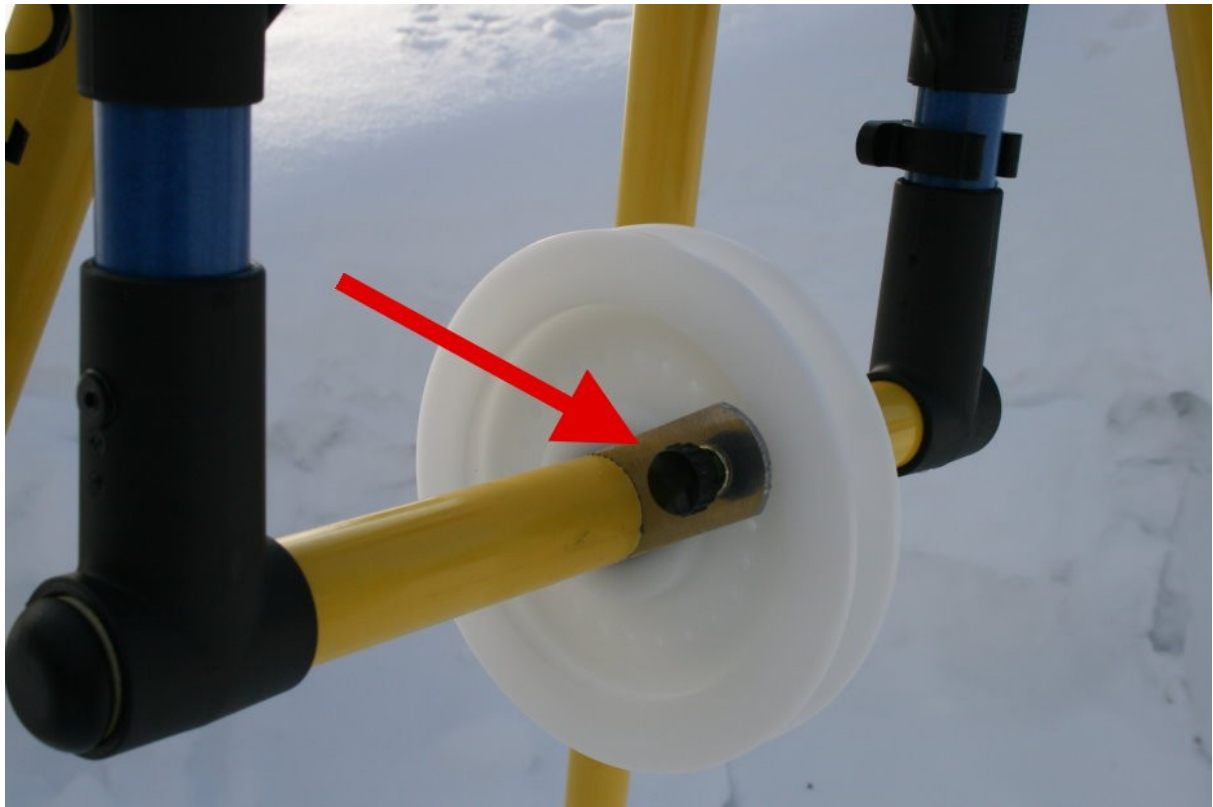

To stop the pulley from rotating screw in the knob shown in the picture so it enters one of the holes in the pulley. The pin has been made short enough to prevent going too far into the pulley, this is a fixing pin not a pass through one.



## **TERMS OF USE:**

Geoscanners AB has made all reasonable efforts to ensure that all information provided through this document is accurate at the time of inclusion; however, there may be inadvertent and occasional errors for which Geoscanners AB apologizes.

Geoscanners AB accepts no liability for any inaccuracies or omissions in this document and any decisions based on information contained in this document are the sole responsibility of the reader. Geoscanners AB accepts no liability for any direct, special, indirect, or consequential damages, or any other damages of whatsoever kind, resulting from whatever cause through the use of any information obtained either directly or indirectly from this document.

This document may not be copied, reproduced, re-published, downloaded, posted, broadcast or transmitted in any way except for your own personal use. Any other use requires the prior written permission of Geoscanners AB. You agree not to adapt, alter or create a derivative work from any of the material contained in this document or use it for any other purpose other than for your personal use. You agree to use this document only for lawful purposes, and in a manner which does not infringe the rights of, or restrict or inhibit the use and enjoyment of this document by any third party.

This document and the information, names, images, pictures, logos and icons regarding or relating to Geoscanners AB, its products and services (or to third party products and services), is provided "AS IS" and on an "IS AVAILABLE" basis without any representation or endorsement made and without warranty of any kind whether express or implied, including but not limited to the implied warranties of satisfactory quality, fitness for a particular purpose, non-infringement, compatibility, security and accuracy.

In no event will Geoscanners AB be liable for any damages including, without limitation, indirect or consequential damages, or any damages whatsoever arising from use or loss of use, data, or profits, whether in action of contract, negligence or other tortious action, arising out of or in connection with the use of this document. Geoscanners AB does not warrant that the functions contained in the material contained in this document will be uninterrupted or error free, that defects will be corrected. The names, images and logos identifying Geoscanners AB and their products and services are proprietary marks of Geoscanners AB. Nothing contained herein shall be construed as conferring by implication or otherwise any license or right under any trade mark or patent of Geoscanners AB, or any other third party.

If there is any conflict between these Terms and Conditions and rules and/or specific terms of use appearing in this document relating to specific material then the latter shall prevail.

If any of these Terms and Conditions should be determined to be illegal, invalid or otherwise unenforceable by reason of the laws of any state or country in which these Terms and Conditions are intended to be effective, then to the extent and within the jurisdiction which that Term or Condition is illegal, invalid or unenforceable, it shall be severed and deleted from this clause and the remaining terms and conditions shall survive, remain in full force and effect and continue to be binding and enforceable.

These Terms and Conditions shall be governed by and construed in accordance with the laws of Sweden. Disputes arising here from shall be exclusively subject to the jurisdiction of the courts of Sweden.

If these Terms and Conditions are not accepted in full, the use of this document must be terminated immediately.